

**eko  
okna**

**CATALOG PVC**









Eko-Okna S.A. is an international manufacturer of PVC, aluminium, steel and wood windows and doors. On the market since 1998. Production takes place in five production halls, equipped with the most modern, fully automated production lines. The production process is supported by qualified and experienced staff. We focus on development and innovation. Our offer is constantly expanding. Today we are able to offer over 30 different window and door systems. Our wide offer also includes sliding systems, roller shutters, sectional garage doors, mosquito nets, and property fences. Everything of the highest quality, because we use only high-class materials from the best European suppliers.

We guarantee safety and durability. We operate on the basis of ISO 9001 quality management systems. Each of our products is CE marked.

We are aware that open communication is the basis of good business relations. Drawing on many years of experience, we have created a company that definitely stands out among other competitors in this respect.

For our clients we have multilingual teams of qualified advisors and regional supervisors. We consider each inquiry, project or order individually so as to best meet the expectations of our clients.

# HEAT TRANSFER COEFFICIENT

$U_w$ [W/m <sup>2</sup> K]	With a spacer bar made of aluminium ( $\Psi = 0,07 \text{ W/m}^2\text{K}$ )								
	$U_g$ $U_f$	1,1	1,0	0,9	0,8	0,7	0,6	0,5	0,4
IDEAL 4000	1,4	1,4	1,3	1,2	1,2	1,1	1,0	-	-
IDEAL 4000 NEW	1,3	1,3	1,3	1,2	1,1	1,1	1,0	-	-
IDEAL 5000	1,2	1,3	1,2	1,2	1,1	1,0	0,97	-	-
IDEAL 7000 NEW	1,1	1,3	1,2	1,1	1,1	1,0	0,93	0,87	0,80
IDEAL 8000	1,0	1,2	1,2	1,1	1,0	0,97	0,90	0,83	0,77
ENERGETO 8000	0,94	1,2	1,2	1,1	1,0	0,95	0,88	0,81	0,75
BLOCKPROFIL NL	1,5	1,4	1,3	1,3	1,2	1,1	1,1	-	-
MONOBLOCK	1,4	1,4	1,3	1,2	1,2	1,1	1,05	-	-
NORDLINE	1,5	1,4	1,3	1,2	1,2	1,1	1,0	-	-
IDEAL 70	1,4	1,4	1,3	1,2	1,2	1,1	1,0	-	-
4000 CASEMENT	1,3	1,3	1,3	1,2	1,1	1,1	0,98	-	-
EASY SLIDE	2,5	1,7	1,6	-	-	-	-	-	-
MULTI SLIDE	2,1	1,7	1,6	1,6	1,5	-	-	-	-
SMART SLIDE	1,4	1,4	1,3	1,3	1,2	1,1	1,0	0,98	-
HST 85	1,4	1,4	1,4	1,3	1,3	1,2	1,2	1,1	1,0
STREAMLINE 76	1,3	1,3	1,3	1,2	1,1	1,1	1,0	0,93	0,86
BLUEEVOLUTION 82	1,1	1,3	1,2	1,1	1,1	1,0	0,94	0,87	0,80
BLUEEVOLUTION 92	1,0	1,2	1,2	1,1	1,0	0,97	0,90	0,83	0,76
EVOLUTIONDRIVE SF	1,8	1,5	1,5	1,4	1,3	1,3	1,2	1,1	1,1
EVOLUTIONDRIVE 82	1,3	1,4	1,3	1,3	1,2	1,2	1,1	1,0	0,97
EKOSUN 70	1,3	1,3	1,3	1,2	1,1	1,1	0,99	0,92	-
EKOSUN 6	1,2	1,3	1,2	1,2	1,1	1,0	0,96	0,89	0,82
EKOSUN 7	1,1	1,3	1,2	1,1	1,1	1,0	0,93	0,86	0,79
EKOSUN HST	1,3	1,4	1,3	1,3	1,2	1,2	1,1	1,0	0,97
S 9000	1,0	1,2	1,2	1,1	1,0	0,96	0,89	0,83	0,76
Gealan HST	1,5	1,5	1,4	1,4	1,3	1,2	1,2	1,1	1,1

All values have been presented for the basic structures of a given system with reference dimensions, i.e. 1.230 x 1.480 mm for windows and 1.480 x 2.180 mm for sliding doors. Uf heat transfer coefficient values are presented as a weighted average.

# HEAT TRANSFER COEFFICIENT

$U_w$ [W/m <sup>2</sup> K]	With a Swisspacer spacer bar ( $\Psi = 0,07 \text{ W/m}^2\text{K}$ )								
	$U_g$	1,1	1,0	0,9	0,8	0,7	0,6	0,5	0,4
IDEAL 4000	1,4	1,3	1,2	1,1	1,1	1,0	0,92	-	-
IDEAL 4000 NEW	1,3	1,2	1,2	1,1	1,0	0,97	0,90	-	-
IDEAL 5000	1,2	1,2	1,1	1,1	1,0	0,94	0,87	-	-
IDEAL 7000 NEW	1,1	1,2	1,1	1,0	0,97	0,90	0,84	0,77	0,70
IDEAL 8000	1,0	1,1	1,1	1,0	0,94	0,87	0,80	0,74	0,67
ENERGETO 8000	0,94	1,1	1,1	0,99	0,92	0,85	0,78	0,72	0,65
BLOCKPROFIL NL	1,5	1,3	1,2	1,2	1,1	1,02	0,95	-	-
MONOBLOCK	1,4	1,3	1,2	1,1	1,1	1,02	0,95	-	-
NORDLINE	1,5	1,3	1,2	1,1	1,1	0,98	0,91	-	-
IDEAL 70	1,4	1,3	1,2	1,1	1,1	0,98	0,91	-	-
4000 CASEMENT	1,3	1,2	1,2	1,1	1,0	0,95	0,88	-	-
EASY SLIDE	2,5	1,6	1,5	-	-	-	-	-	-
MULTI SLIDE	2,1	1,6	1,5	1,4	1,4	-	-	-	-
SMART SLIDE	1,4	1,3	1,2	1,1	1,1	0,99	0,92	0,85	-
HST 85	1,4	1,3	1,3	1,2	1,2	1,1	1,0	0,98	0,92
STREAMLINE 76	1,3	1,2	1,2	1,1	1,0	0,97	0,90	0,83	0,77
BLUEEVOLUTION 82	1,1	1,2	1,1	1,0	0,97	0,91	0,84	0,77	0,71
BLUEEVOLUTION 92	1,0	1,1	1,1	1,0	0,94	0,87	0,80	0,73	0,67
EVOLUTIONDRIVE SF	1,8	1,4	1,4	1,3	1,2	1,2	1,1	1,0	0,96
EVOLUTIONDRIVE 82	1,3	1,3	1,2	1,2	1,1	1,03	0,97	0,92	0,86
EKOSUN 70	1,3	1,2	1,2	1,1	1,0	0,96	0,89	0,82	-
EKOSUN 6	1,2	1,2	1,1	1,1	1,0	0,93	0,86	0,79	0,72
EKOSUN 7	1,1	1,2	1,1	1,0	0,97	0,90	0,83	0,76	0,69
EKOSUN HST	1,3	1,3	1,2	1,2	1,1	1,03	0,97	0,92	0,86
S 9000	1,0	1,1	1,1	1,0	0,94	0,87	0,80	0,73	0,66
Gealan HST	1,5	1,4	1,3	1,2	1,2	1,13	1,07	1,01	0,96

All values have been presented for the basic structures of a given system with reference dimensions, i.e. 1.230 x 1.480 mm for windows and 1.480 x 2.180 mm for sliding doors. Uf heat transfer coefficient values are presented as a weighted average.

# ALUPLAST SYSTEMS

---



IDEAL 4000	10
IDEAL 4000 NEW	12
IDEAL 5000	14
IDEAL 7000 NEW	16
IDEAL 8000	18
ENERGETO 8000	20
BLOCKPROFIL NL	22
MONOBLOCK	24
NORDLINE	26
IDEAL 70	28
IDEAL 4000 CASEMENT	30
EASY SLIDE	32
MULTI SLIDE	34
SMART SLIDE	36
HST 70	38
HST 85	40



# IDEAL 4000

WINDOW AND DOOR SYSTEM



**1,0**

Uw for Ug = 0.7  
(Ultimate spacer bar)

**2**

gaskets

**5**

chambers (frame)

**70**

construction depth  
(mm)

**R**

renovation

**A**

aluminium cover



glazing with packages up  
to a width of 42 mm



the standard fitting is  
equipped with two anti-  
burglary points per sash



standard blockade of incorrect  
handle position (RU window)


## IDEAL 4000

It is a universal system that works well both in modern architecture of single-family and multi-family housing, as well as in the case of renovation. As standard, windows made on the basis of the Ideal 4000 system are equipped with two anti-burglary catches on the sash and pivots to prevent burglary with adjustable pressure. An important element of the fitting is the central clamp. The clamp automatically adjusts to the clearance. It ensures not only safety, but also tightness and light functioning of window sashes. As standard, all fittings for tilt-and-turn windows are supplemented with a lock against handle misplacement. An additional functional element is the micro-ventilation scissor, which creates the possibility of slot ventilation.


For customers who value security, we offer to equip the windows with additional anti-burglary catches, which are available when selecting fittings that meet the RC1N / RC2N class conditions.



### Ideal 4000 variants

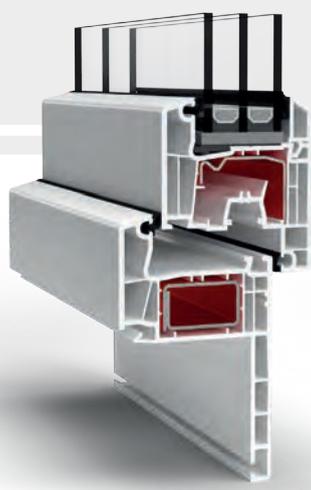

RENOVATION 65 MM | 40 MM

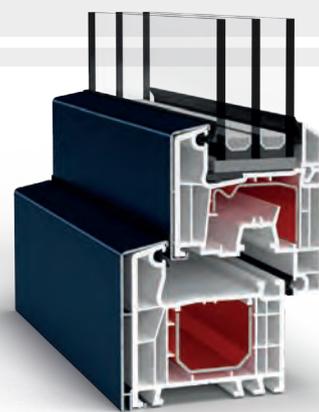

ALUMINIUM COVER

# IDEAL 4000 NEW

WINDOW AND DOOR SYSTEM



**0,97**

Uw for Ug = 0.7  
(Ultimate spacer bar)

**2**

gaskets

**6**

chambers (frame)

**85**

construction depth  
(mm)



standard blockade of  
incorrect handle position  
(RU window)



available in a variant with a  
straight or semi-flush sash



on a white and brown core

## IDEAL 4000 NEW

The combination of the most popular solution with the six-chamber structure of the frame allowed for better thermal insulation of the window. High standard based on a product proven and appreciated by the market.

The Ideal 4000 profile series combines the latest technology with the highest living comfort. The structure of profiles with a depth of 70-85 mm allows to achieve good thermal parameters, thus creating a comfortable space for little money.

As standard, windows made on the basis of the Ideal 4000 New system are equipped with two anti-burglary catches on the sash and pivots to prevent burglary with adjustable pressure.

An additional functional element that we offer as standard as one of the few manufacturers is the micro-ventilation scissor, which enables slot ventilation.

# IDEAL 5000

WINDOW AND DOOR SYSTEM



**0,94**

Uw for Ug = 0.7  
(Ultimate spacer bar)

**3**

gaskets

**5**

chambers (frame)

**70**

construction depth  
(mm)

**R**

renovation

**A**

aluminium cover



a vasalatok ún. száraz kamrában működnek – ez növeli élettartamukat



available in a variant with a straight or semi-flush sash



rejtett zsanérok alkalmazhatók

## IDEAL 5000


Windows combining modern design with very good technical parameters. The system is equipped with 3 gaskets, thanks to which it is characterized by high parameters of water resistance and air permeability. It is also available in a version with a lower frame, thanks to which we obtain a larger glazed area, which allows for better illumination of every room.

As a standard, windows in this system are equipped with a double-glazed unit, but it can be successfully replaced with a triple-glazed because this system allows the use of 42 mm glazing. This replacement will significantly reduce the thermal transmittance of the window.


It is worth remembering that the lower the coefficient, the higher the savings from bills for thermal energy. For this reason, we recommend choosing a warm spacer. Made of a complex composite material, it improves the insulation of the glass and reduces the risk of temporary condensation of water vapor.

IDEAL 5000

### Ideal 5000 variants

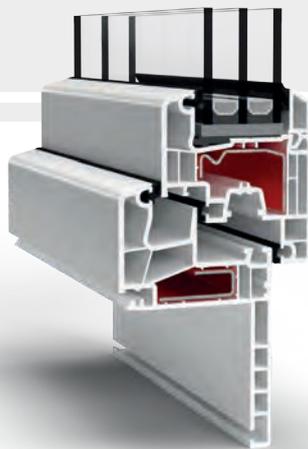

RENOVATION 65 MM | 40 MM

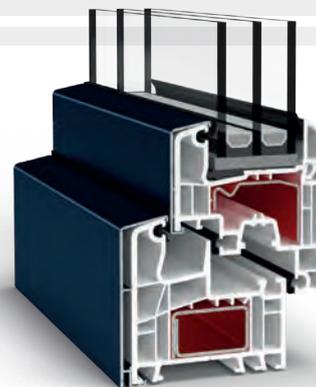

ALUMINIUM COVER

# IDEAL 7000 NEW

WINDOW AND DOOR SYSTEM



**0,77**

$U_w$  for  $U_g = 0,5$   
(Ultimate spacer bar)

**2**

gaskets

**6**

chambers (frame)

**85**

construction depth  
(mm)



open steel 1.5 mm thick as  
standard



on a white and brown core



glazing with packages up  
to 52 mm wide

## IDEAL 7000 NEW

Modern architecture requires new standards in the technical, functional and aesthetic sphere. Windows based on the 7000 New system are a completely new approach to energy efficiency. It is also a breakthrough in the production of PVC windows. New possibilities are created by the "powerdur inside" technology, which allows you to remove the steel reinforcement from the frame and replace it with special, thermoplastic inserts reinforced with Ultradur High Speed polymer. The elimination of steel from the frame also means the elimination of thermal bridges, and therefore the possibility of obtaining even better parameters of thermal transmittance of sections.

Profiles with a depth of 85 mm also create great opportunities for choosing a glazing package. It is enough to choose a window with a two-chamber glazing unit with a warm frame to achieve the  $U_w$  heat transfer coefficient of  $0.77W / m^2K$ .

# IDEAL 8000

WINDOW AND DOOR SYSTEM



**0,74**

Uw for Ug = 0.5  
(Ultimate spacer bar)

**3**

gaskets

**6**

chambers (frame)

**85**

construction depth  
(mm)

**A**

aluminium cover



standard fitting with 6 anti-burglary points



recommended for passive construction



glazing with packages up to 52 mm wide

## IDEAL 8000


Latest generation windows. By choosing them - you choose warmth, silence and aesthetics. Windows based on the Ideal 8000 system provide thermal properties and acoustic insulation at the highest level.

Windows made on the basis of the Ideal 8000 system are equipped with fittings with 6 anti-burglary points, consisting of special hooks and pins that prevent burglary and at the same time regulate the pressure.

Ideal 8000 is the warmest system from the Ideal family that we offer. It creates great opportunities. Its installation depth allows for the installation of glazing units even 52 mm wide. For customers who value the combination of the highest quality with thermal and acoustic comfort, we recommend retrofitting the windows with a wider, even four-pane package, ensuring perfect conditions inside the building.

This system also sets standards in terms of performance, characterized by even the highest, fourth class of air permeability and class 8A for water resistance.

### Ideal 8000 variant

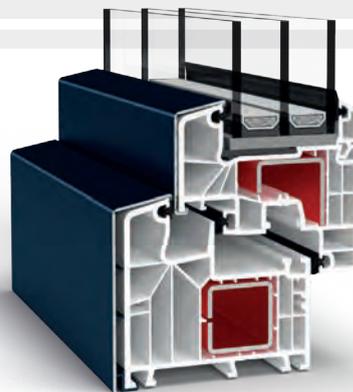

ALUMINIUM COVER

# ENERGETO 8000

WINDOW AND DOOR SYSTEM



**0,72**

Uw for Ug = 0.5  
(Ultimate spacer bar)

**3**

gaskets

**6**

chambers (frame)

**85**

construction depth  
(mm)

**A**

aluminium cover



possibility of using Maco  
Multi-Power fittings



recommended for  
energy-saving and passive  
construction



Ultradur High Speed  
reinforcement


## ENERGETO 8000

Windows based on the Energeto 8000 system are a completely new approach to energy efficiency. New possibilities are created by the Ultradur High Speed technology, which allows the removal of the steel reinforcement from the frame. In the system, the standard steel reinforcement in the frame is replaced with special plastic inserts.

The standard glazing of windows also looks different, because in this system the glazing is always glued to the window sash. The glue is applied around the perimeter of the glass, thanks to which it is permanently attached to the sash. This solution makes the glass become a structural element of the window, which increases its stability. Windows made on the basis of the Energeto 8000 system are equipped with fitting that is characterized by six safe points and supplemented with a lock for incorrect handle position.

Energeto 8000 owes its name to its amazing thermal properties. Windows allow for a heat transfer coefficient below  $0.75W / m^2K$ , which allows the system to be used in low-energy and passive houses.

### Energeto 8000 variant

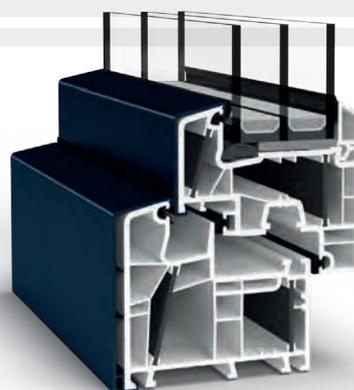

ALUMINIUM COVER

# BLOCKPROFIL NL

WINDOW AND DOOR SYSTEM



**0,95**

Uw for Ug = 0,6  
(Ultimate spacer bar)

**2**

gaskets

**3**

chambers (frame)

**120**

construction depth  
(mm)



can be made in HFL  
technology



possibility of installing a  
central handle



standard blockade of  
incorrect handle position  
(RU window)

## BLOCKPROFIL NL

A system dedicated specifically to the Dutch market. Due to different assembly methods, we offer two types of frames.

Blockprofil NL can be made using the standard V-super weld, but also with the innovative method of joining profiles, which is HFL. The HFL welding technology is distinguished by the angle of joining horizontal and vertical profiles. V-super and V-perfect welds, which are standard in other systems, are created by joining profiles at an angle of 45 degrees. HFL technology allows to connect profiles at an angle of 90 degrees, which completely changes the appearance of the window, creating an imitation of a structure made of wood.

We make Blockprofil NL windows in dozens of smooth and wood-like colours. We offer one-sided veneering (on the outside or inside), double-sided or in the duo-colour formula (the woodwork has a different colour on the inside and a different colour on the outside). Thanks to these possibilities, it is possible to maintain a harmonious appearance of the façade and to match the appearance of the window to the interior arrangement.

# MONOBLOCK

WINDOW AND DOOR SYSTEM



1,0

Uw for Ug = 0,7  
(Ultimate spacer bar)

2

gaskets

5

chambers (frame)

162

construction depth  
(mm)



possibility of combining the frame with different types of sashes (Classic-line or Round-line)



frame depth 70, 102, 122, 142 or 162 mm



the possibility of using an opening brake controlled by a handle

## MONOBLOCK

Windows designed for installation in the insulation layer. The thickness of the insulation is not a problem as Monoblock frames are available in several width variants. Windows dedicated to the French market.

Monoblock windows, as standard, are available with a double-glazed unit. In order to reduce the  $U_w$  heat transfer coefficient of the windows, it is worth equipping them with a triple-glazed unit. We also recommend warm spacer bars made of composite material, which improve the insulation of the glass and reduce the risk of temporary condensation of water vapor.

The windows can also be fitted with a brake in the handle, handles with a key, mosquito nets and other accessories. Investors who want their windows to look a bit more elegant, we recommend supplementing them with bolections. The muntin bars play mainly a decorative role. Our offer includes internal bolections and glued bolections.

Depending on the selected type of muntin bars, they are placed between the glass panes or glued to the glass surface.

# NORDLINE

WINDOW AND DOOR SYSTEM



**0,98**

Uw for Ug = 0.7  
(Ultimate spacer bar)

**2**

gaskets

**5**

chambers (frame)

**120**

construction depth  
(mm)



possibility of hidden  
drainage



large glazing



the possibility of using  
glazing with a width  
of 10 to 42 mm

## NORDLINE

Extremely distinctive system, dedicated to the Scandinavian markets. Windows made on the basis of this product line have an extraordinary internal sill with a total depth of 120 mm.

A characteristic feature of windows based on the NordLine system is the way they are opened. The windows, depending on the needs, can open both inwards and outwards. The latter solution fits perfectly into the construction style of the Scandinavian markets.

Outward opening windows provide the highest degree of tightness. The wind pressing on the wings presses them down, which makes the window a perfect insulator. An additional advantage of such a solution is, of course, space saving and no barriers in the room.

Joining profiles in this system is made by means of a V-super weld, and the profile core is always white.

# IDEAL 70

WINDOW AND DOOR SYSTEM



**0,91**

Uw for Ug = 0,6  
(Ultimate spacer bar)

**2**

gaskets

**5**

chambers (frame)

**70**

construction depth  
(mm)



the possibility of producing windows that open both to the outside and inside



full range of extensions and connectors



the possibility of using glazing with a width of 10 to 42 mm



## IDEAL 70

Outward opening window system intended for the UK market. The system definitely stands out from the rest. Profiles are welded in a technology in line with the trends prevailing on the British market and are in accordance with the regulations and standards that apply to it.

Ideal 70 is primarily harmonious shapes, strong construction, attractive design and a guarantee of timeless elegance. The system allows glazing with packages up to 42 mm wide, which translates into on the possibility of obtaining attractive thermal values.

Various types of additional profiles, connectors and extensions significantly increase the attractiveness of the system. It is also worth noting that the Ideal 70 system has all the necessary documents authorizing it to be used and traded in the UK.

# IDEAL 4000 CASEMENT

WINDOW AND DOOR SYSTEM



**0,88**

Uw for Ug = 0.6  
(Ultimate spacer bar)

**2**

gaskets

**5**

chambers (frame)

**70**

construction depth  
(mm)



profile adapted to the requirements of the UK market



an ideal solution for both residential and public buildings



the possibility of using glazing with a width of 10 to 42 mm

## IDEAL 4000 CASEMENT

A system dedicated to the production of outward opening windows, popular in particular in Great Britain, Australia and the USA. Recommended both for installation in residential and public utility buildings. Their classic appearance makes them appreciated by customers. The system offers great design possibilities.

Windows based on the Ideal 4000 Casement system look identical on the outside and inside - both the slats and profiles have a simple shape. The glazing bead securing system meets the requirements of the Secure by Design and PAS24 programs.

Thanks to a wide number of additional profiles, connectors and extensions, you can create windows of various combinations. Windows made on the basis of the Ideal 4000 Casement system are also characterized by very good thermal properties that allow to obtain  $U_w$  values below  $0.9W / m^2K$ .

# EASY SLIDE

SLIDING DOOR SYSTEM



1,5

U<sub>w</sub> for U<sub>g</sub> = 1,0  
(Ultimate spacer bar)

2

amount of tracks  
scrolling

60

construction depth  
(mm)



system available in the  
scheme: A, D



maximum construction  
width 2850 mm



glazing with packets  
from 4 to 20 mm wide

## EASY SLIDE

The Easy Slide system is a basic sliding door system that creates a thin, aesthetic construction partition. The doors in this system can move along two tracks. The trolleys are equipped with high-quality levelling pads for PVC systems, side supports, and a support that relieves the rollers of the trolleys. The elements will ensure long-term operation of the trolleys and avoid blocking the system.

Glazing with packages up to 20 mm wide allows the use of a double-pane package, both in the basic version and with the use of safety glass.

Despite the fact that the system includes steel reinforcements inside the profiles, it must be remembered that the design limitation in this system is 60 kg per sash. This system uses brush seals at the point of contact of the sashes with the frame and between the sashes.

The wide range of available colours can give the door an interesting look. Sliding doors based on the Easy Slide system can take any colour from the Aluplast colour palette.

# MULTI SLIDE

WINDOW AND DOOR SLIDING SYSTEM.



1,4

Uw for Ug = 0,9  
(Ultimate spacer bar)

2-3

amount of tracks  
scrolling

170

maximum  
installation depth  
(mm)



system available in the  
scheme: A, An, C, D



maximum construction  
width 3600 mm



glazing with packets  
from 4 to 33 mm wide

## MULTI SLIDE

The perfect choice for customers looking for an economical solution for small spaces. Sliding structures made on the basis of this system will work well in places where balcony windows with an inward opening sash cannot be used, due to the limited space in the room.

With the Multi Slide system you can make sliding doors with a maximum area of 7.25 m<sup>2</sup>. The use of a special frame profile, which acts as an additional track, enables the construction of a three-track structure. Thanks to this, an effect similar to the folding door can be obtained, where the following sashes, after opening, slide over one of the extreme sections, creating one, uninterrupted passageway.

The Multi Slide system uses brush seals at the contact point of the sashes with the frame and between the sashes.

# SMART SLIDE

SLIDING DOOR SYSTEM



0,92

U<sub>w</sub> for U<sub>g</sub> = 0,6  
(Ultimate spacer bar)

2

amount of tracks  
scrolling

140

construction depth  
(mm)



system available in the  
scheme: A, C



one-sided or two-sided  
handle to choose from



glazing with packages up to  
42 mm

## SMART SLIDE

Smart Slide is a sliding door, but the innovative closing mechanism allows for simple and intuitive operation, similar to the solutions used in lift-slide doors.

It is worth recommending the system to your clients for another reason. Using it, you can easily make larger structures, in which the sash can reach a size of up to 1.5 x 2.3 m.

The installation depth is 140 mm, and the glazing units can have a maximum width of 42 mm. This means that the doors based on the Smart Slide system are not only functional, they can be used to create large structures, but also have high thermal values.

Smart Slide sliding doors can be equipped with air inlets. We also recommend a full range of smooth and wood-like veneers, thanks to which the doors will adapt to any type of interior or facade.

# HST 70

LIFT AND SLIDE DOOR SYSTEM



1,1

Uw for Ug = 0.7  
(Ultimate spacer bar)

2

amount of tracks  
scrolling

167

construction depth  
(mm)



system available in the  
scheme: A, C, D, G, K



the possibility of using a  
motorized espagnolette



glazing with packages with a  
width of 10 to 42 mm

## HST 70

The lift and slide doors based on the HST 70 system are a solution dedicated primarily to single-family housing. This type of door is highly functional and can therefore be an interesting alternative to traditional balcony or terrace windows at an affordable price.

The solid profiles are reinforced with aluminium. Thanks to this, the system offers great opportunities, enabling the construction of a structure with dimensions of 6.7 x 2.5 m.

HST 70 allows you to create structures with various opening patterns on two or three tracks, in which the wings can be up to 3 x 2.5 m.

The creation of various systems is also possible thanks to fittings of a recognized German supplier - the G-U company. It is thanks to them that the running sashes move extremely easily, even in the case of large and heavy structures. The guides are made of aluminium, and the solid trolleys, bolts and handles ensure trouble-free use for many years. The optimal corrosion protection of the fitting is provided by a special coating which covers all its elements.

# HST 85

LIFT AND SLIDE DOOR SYSTEM



**0,98**

Uw for Ug = 0,5  
(Ultimate spacer bar)

**2**

amount of tracks  
scrolling

**197**

construction depth  
(mm)

**A**

aluminium cover



system available in the  
scheme: A, C, D



maximum sash  
weight - 400 kg



glazing with packages with a  
width of 20 to 52 mm

## HST 85

Lift and slide door system with high thermal properties. It enables the construction of large-format glazing while maintaining the best thermal insulation parameters. The system is available in three variants: Basic, Standard and Premium. Each of them has a different threshold. When using the Premium version, it can be freely used in low-energy buildings.

To maintain the aesthetics of the finish in the Premium version, we enable the installation of Aluskin aluminium covers. This solution has been reserved exclusively for this sliding door system.

The profiles can have a white, brown, cream or anthracite core. Thanks to this, when using veneers, you can obtain a consistent colour of the profile.

The HST 85 system enables the construction of large-sized, glazed lift and slide doors. The maximum width of the set is as much as 6.7 meters, and the maximum permissible dimensions of the wings are 3x2.5 m.

### HST 85 variant



ALUMINIUM COVER

# SALAMNDER SYSTEMS

---



STREAMLINE 76	44
BLUEEVOLUTION 82	46
BLUEEVOLUTION 92	48
EVOLUTIONDRIVE 82	50
EVOLUTIONDRIVE SF	52



# STREAMLINE 76

WINDOW AND DOOR SYSTEM.



**0,97**

Uw for Ug = 0.7  
(Ultimate spacer bar)

**2**

gaskets

**5**

chambers (frame)

**76**

construction depth  
(mm)

**R**

renovation

**A**

aluminium cover



standard blockade of  
incorrect handle position  
(RU windows)



standard hardware with 6  
anti-burglary points



on a white, brown and  
caramel core


## STREAMLINE 76

An excellent choice for people who value elegance and comfort. Windows based on the Streamline 76 system combine maximum safety, high thermal and acoustic insulation. Resistant to external factors, characterized by an intense white colour.


As standard, the windows are equipped with six anti-burglary points per sash, and anti-burglary pins with adjustable pressure and a blockade of incorrect handle position. The internal centre pressure also plays an important role here. The clamp ensures not only safety, but also tightness and easy operation of the window sashes.

Based on the Streamline 76 system, in addition to typical windows, we also create renovation windows. Their assembly is extremely simple and quick. It does not require disassembly of the old window frame, so we can be sure that we will not breach the walls and elevations in any way. The non-invasive installation of the window makes it the best, and sometimes the only solution for use in historic buildings.

### Streamline 76 variants

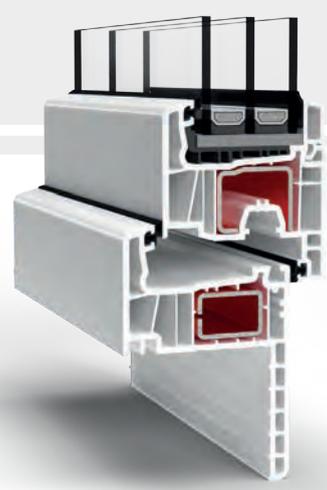

RENOVATION 60 MM | 35 MM

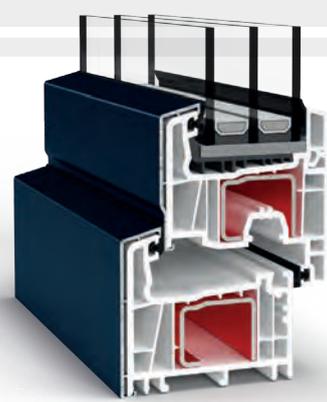

ALUMINIUM COVER

# BLUEVOLUTION 82

WINDOW AND DOOR SYSTEM.



**0,77**

Uw for Ug = 0,5  
(Ultimate spacer bar)

**3**

gaskets

**6**

chambers (frame)

**82**

construction depth  
(mm)

**R**

renovation

**A**

aluminium cover



standard hardware with 6  
anti-theft points



standard blockade of  
incorrect handle position (RU  
windows)



glazing with packages up  
to 53 mm wide

## BLUEVOLUTION 82

The optimal combination of innovative technology and the best thermal protection parameters, appropriate for energy-saving construction. Windows made in the BluEvolution 82 system are already equipped as standard with a two-chamber package of warm glass with a heat transfer coefficient of  $U_g = 0.5W / m^2K$ .

A huge advantage is the profiles themselves, which are not only made of high-quality PVC, but above all are an excellent thermal insulator, which is guaranteed by the six-chamber structure of the profile and the triple sealing system. The installation depth of 82 mm allows for glazing with packets up to a width of 53 mm. If the window is also supplemented with a warm spacer, we can obtain thermal transmittance parameters corresponding to those of energy-saving windows, additionally reducing the risk of temporary condensation of water vapor.


The profiles are made of the highest quality PVC, thanks to which they are characterized by a unique, shiny, snow-white color.

BLUEVOLUTION 82

### Bluevolution 82 variants



RENOVATION 60 MM | 35 MM

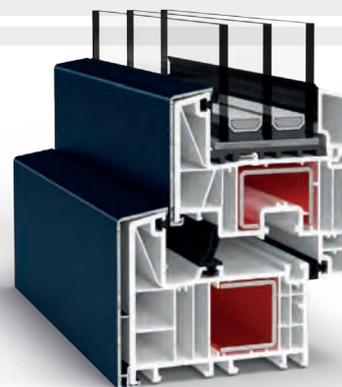

ALUMINIUM COVER

# BLUEVOLUTION 92

WINDOW AND DOOR SYSTEM.



**0,73**

Uw for Ug = 0,5  
(Ultimate spacer bar)

**3**

gaskets

**6**

chambers (frame)

**92**

construction depth  
(mm)



standard fitting with  
6 anti-burglary points



characteristic, extremely white  
and shiny profiles



possibility of glazing with  
four-pane packages

## BLUEVOLUTION 92

Guarantee of the highest energy efficiency. The solution combines modern technologies, functionality and great design, resulting in top-class windows. A characteristic feature of the system is the extremely snow-white colour and gloss of the profiles.

BluEvolution 92 windows already provide the best thermal insulation that we can guarantee as standard. A two-chamber glazing unit, three gaskets, a profile with a depth of 92 mm - all these elements have an impact on the obtained very low heat transfer coefficients, which makes them very eagerly used by investors looking for energy-saving joinery.

Windows based on the profiles of a recognized German manufacturer create new standards in terms of long-term durability and care of the woodwork surface. They are characterized by a unique, snow-white colour. Glossy profiles, made of the highest quality PVC, are easy to keep clean and resistant to weather conditions.

BluEvolution 92 profile belongs to the highest class of profiles. Class A and steel that strengthens the structure prevent the deformation of frames and sashes, even with large windows.

# EVOLUTIONDRIVE SF

WINDOW AND DOOR SLIDING SYSTEM.



1,0

Uw for Ug = 0,5  
(Ultimate spacer bar)

2

amount of tracks  
scrolling

76

construction depth  
(mm)



system available  
in the diagram: A, C



frame depth compatible  
with the Strenline 76  
window system



sash width 50 mm

## EVOLUTIONDRIVE SF

Using the EvolutionDrive SF system, you can build sliding doors with a good price-quality ratio. The solution is universal in use.

The width of its frame, which is 76 mm, not only convinces with a modern style, but above all is compatible with all profiles and connectors from the Streamline profile series.

Additionally, it allows the use of large-size glazing, which gives the house a cosy character while providing good access to natural light.

Another advantage is the colour offer. A wide range of colours gives designers and users of joinery a creative space, allowing them to adapt to each individual style of construction.

# EVOLUTIONDRIVE 82

WINDOW AND DOOR SLIDING SYSTEM.



0,92

Uw for Ug = 0.5  
(Ultimate spacer bar)

2

amount of tracks  
scrolling

194

construction depth  
(mm)



System available  
in the diagram: A, C, K



structures up to  
6.4 meters wide



glazing with packages  
up to 53 mm

## EVOLUTIONDRIVE 82

The lift and slide door system allows for the production of large glazing while maintaining good thermal parameters. A characteristic feature of the system is the possibility of equipping it with a low threshold, which allows it to be used in "building without barriers".

The depth of the door construction based on the EvolutionDrive 82 system is 82 mm. Thanks to this, they can be supplemented with a wider glazing unit, the thermal transmittance coefficient of which can even be  $U_g = 0.4W / m^2K$ .

In order to meet the highest statics requirements, the EvolutionDrive 82 lift and slide door uses a stepped reinforcement concept.

In order to match the colour of this system with the window systems within it, we enable the selection of profiles on the core in a shade of standard white, snowy-white, which are characteristic for Evolution series profiles, as well as brown and caramel.

# EKOSUN SYSTEMS

---



EKOSUN 70	56
EKOSUN 6	58
EKOSUN 7	60
EKOSUN HST	62



# EKOSUN 70

WINDOW AND DOOR SYSTEM



**0,96**

Uw for Ug = 0.7  
(Ultimate spacer bar)

**2**

gaskets

**6**

chambers (frame)

**70**

construction depth  
(mm)

**R**

renovation



standard blockade of  
incorrect handle position  
(RU windows)



standard fitting with two  
points anti-burglary points  
per window sash



available in the variant with  
Round-Line or Classic-Line  
sash

## EKOSUN 70

The system is designed on the basis of proven design solutions. It is a response to the needs of most customers - it is stable, stiff, tight and provides good sound and thermal insulation. An effective barrier for the heat running out from the inside creates a wide profile with a six-chamber structure.

Profiles in the EkoSun 70 system are available in two variants (Soft-Line and Round-Line), thanks to which they create great arrangement possibilities. They are available in a wide range of smooth and wood-like colours. Windows can be veneered on one side, on both sides and in the duo-colour formula. The use of the duo-colour veneer will allow for a perfect match of the joinery appearance to both the façade and interior design.

As standard, EkoSun 70 windows are equipped with two anti-burglary catches and pivots to prevent burglary with adjustable pressure. These elements ensure optimal safety of use.

### EkoSun 70 variant



RENOVATION 49 MM

# EKOSUN 6

WINDOW AND DOOR SYSTEM



**0,79**

Uw for Ug = 0,5  
(Ultimate spacer bar)

**2**

gaskets

**6**

chambers (frame)

**81**

construction depth  
(mm)



available as a variant with  
Soft-line sash



possibility of making windows  
with a fixed or movable post



glazing with packages up to  
55 mm wide

## EKOSUN 6

Thermal and acoustic insulation at a very good level. Windows that guarantee thermal comfort and durability for many years. Best value for money. Recommended for energy-saving construction.

The aesthetic qualities of windows made based on the EkoSun 6 system go hand in hand with technical parameters. The system has very good thermal properties and offers great design possibilities. Profiles with a depth of 81 mm allow the use of glazing units up to a width of 55 mm.

To obtain the highest thermal insulation parameters, we recommend supplementing the EkoSun 6 windows with a triple-pane package and a warm spacer. The warm frame is made of a complex insulating material. It improves the insulation of glass panes and reduces the risk of temporary condensation of water vapor. In addition, warm frames guarantee long-term tightness of insulating glass units and maximize the savings of thermal energy losses by reducing the thermal bridge between the frame and the rail.

In order to complete the product, we recommend the selection of both hygroscopic and pressure ventilators with which you can maintain adequate ventilation in the rooms. Diffusers are placed in the upper profile of the frame and sash, and the milling cutters for their assembly can be made at the production stage.

# EKOSUN 7

WINDOW AND DOOR SYSTEM



**0,76**

Uw for Ug = 0.5  
(Ultimate spacer bar)

**3**

gaskets

**7**

chambers (frame)

**81**

construction depth  
(mm)

**A**

aluminium cover



optional "A" class profiles  
available



fittings work in the so-called  
dry chamber - which  
increases their service life



glazing with packages up  
to 55 mm wide

## EKOSUN 7

For people looking for energy-saving solutions at a good price, we recommend windows in the EkoSun 7 system. Seven is a product recommended for passive construction. The triple sealing system in combination with seven chambers in the frame with a depth of 81 mm makes the windows a very good insulator. Thanks to the third gasket, we not only gain better functional properties, but also increase the service life of the fitting, as it is less exposed to moisture. We recommend supplementing windows in this system with a triple-pane package and a warm spacer, thanks to which windows built on the basis of this profile will become a complete offer for customers looking for the best solutions.

Seven creates great opportunities - both in terms of functionality and aesthetics. As standard, the EkoSun 7 windows are equipped with two anti-burglary catches and anti-burglary pins with adjustable pressure. These elements provide optimal protection. Safety of use is guaranteed by the lock of the incorrect position of the handle, which is installed in tilt and turn windows in standard.

### EkoSun 7 variant



ALUMINIUM COVER

# EKOSUN HST

WINDOW AND DOOR SLIDING SYSTEM



**0,92**

Uw for Ug = 0,5  
(Ultimate spacer bar)

**2**

amount of tracks  
scrolling

**197**

construction depth  
(mm)



system available in the  
scheme: A



maximum sash  
weight - 400 kg



maximum width  
of structure 6.7 mm



## EKOSUN HST

EkoSun HST is a system of lift and slide doors characterized by incredible comfort and the possibility of creating spacious, glass structures. The low profile guarantees an adequate supply of light, and at the same time ensures water resistance at the highest level. Thanks to the use of a low threshold, the EkoSun HST system can be used in "construction without barriers".

When creating the EkoSun HST system, we tried to make this product stand out from others available on the market. EkoSun HST is a low profile, which provides better interior lighting. The unique design of the EkoSun HST threshold and the gaskets used guarantee adequate tightness.

The EkoSun HST system is characterized by very good static properties. Due to the fact that it is a rigid profile, it can be used to create wings up to 6.7 m wide. This system also allows for heavy loads (up to 400 kg), thanks to which it can use glazing units up to 55 mm, which are characterized by the best thermal insulation parameters.

# GEALAN SYSTEMS

---



S 9000	66
GEALAN HST	68



# S 9000

WINDOW AND DOOR SYSTEM



**0,73**

Uw for Ug = 0.5  
(Ultimate spacer bar)

**3**

gaskets

**6**

chambers (frame)

**82,5**

construction depth  
(mm)

**R**

renovation

**A**

aluminium cover



glazing with STV  
technology (only in  
windows)



the possibility of using a  
movable post



6 anti-burglary points per  
sash as standard

## S 9000


The best statics, the ability to build large structures without the need to install crossbars, glazing with the use of STV technology, colouring of profiles using acrylcolor - these are just some of the unusual features of the S 9000 system. The security of windows made with the S 9000 system is that there are six anti-burglary points. In addition, it is supplemented with a handle incorrect position blockade.

The STV technology used in this system is something that we do not offer in any other. Pasting the glass panes improves the statics of the entire structure. The process of glazing with this technology and the possible replacement of the glass are easier than in standard windows.


System S 9000 is welded using the V-Perfect technology. Thanks to this, we provide our customers with precisely finished woodwork, because the place of joining the profiles becomes practically invisible.

S 9000

### S 9000 variants

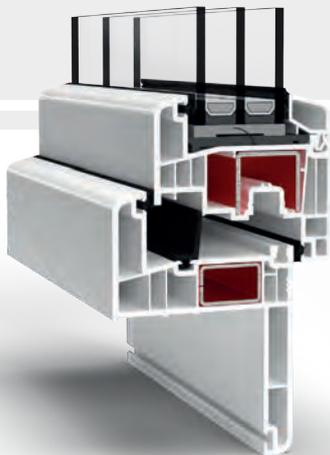

RENOVATION 65 MM | 35 MM

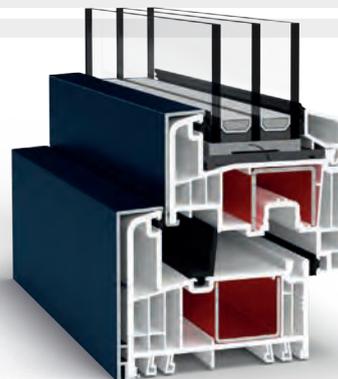

ALUMINIUM COVER

# GEALAN HST

WINDOW AND DOOR SLIDING SYSTEM



1,00

Uw for Ug = 0,5  
(Ultimate spacer bar)

2

amount of tracks  
scrolling

190

installation depth  
(mm)



system available in the  
scheme: A



the possibility of colouring  
the surface of profiles with  
the acrylcolor technology



glazing with packages up  
to 52 mm

## GEALAN HST

Gealan lift and slide doors allow for the creation of large glazing of various structures, as the system is adapted to the installation of triple-pane packages with a width of up to 52 mm.


The HST system based on the S 9000 platform meets all technical and visual requirements of the latest generation sliding systems. Thanks to the perfect design, large elements are moved by the user practically without effort, and large glazing ensures effective illumination of the interior, both when the door is closed and open.

Acrycolor is a technology reserved only for this lift and slide door system. At the extrusion stage, the PVC profile is permanently connected with the coloured acrylic glass. The result is a coating that has an elegant and smooth structure, and is also resistant to weather conditions.

The heat transfer coefficient in this system guarantees very good thermal conditions inside the room.

# COLOURING

Windows are more and more often a decorative element of both the entire building and the interior. The basic method is to choose the colour and structure of the veneer. We have a wide range of colours of smooth and wood-like veneers, as well as profiles characterized by a satin surface made in acrycolor technology.

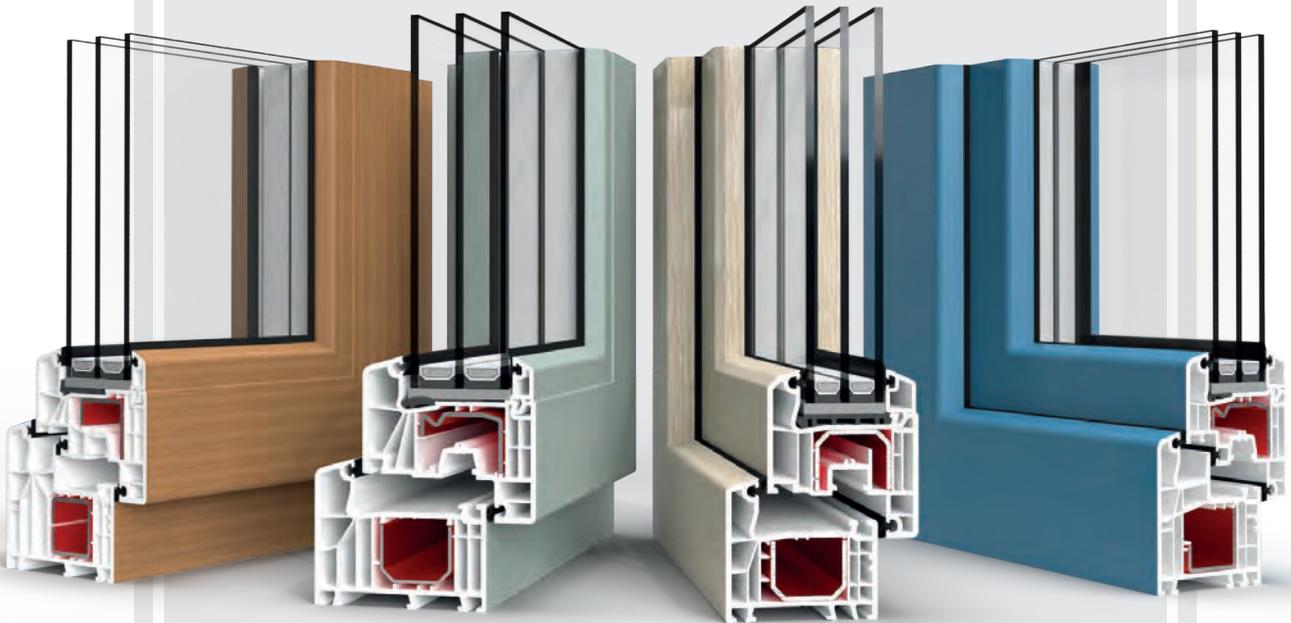



# ALUPLAST



AP 01



AP 02



AP 05



AP 06



AP 11



AP 15



AP 19



AP 20



AP 21



AP 23



AP 27



AP 28



AP 29



AP 30



AP 32



AP 33




AP 34



AP 40



AP 41



AP 43



AP 44



AP 47



AP 50



AP 52



AP 60




AP 61



AP 62



AP 63



AP 65



AP 70



AP 71



AP 72



AP 75



AP 79



AP 88




AP 94



AP 95



AP 102



AP 103




AP 104




AP 105



AP 106



AP 107



AP 108



AP 109



AP 110



AP 111



AP 112



AP 113



AP 115



AP 116

# SALAMANDER



SAL 02



SAL 03



SAL 11



SAL 18



SAL 19



SAL 21



SAL 25



SAL 26



SAL 27



SAL 33



SAL 37



SAL 39



SAL 41




SAL 43



SAL 50



SAL 51



SAL 52



SAL 59



SAL 60



SAL 61



SAL 62



SAL 67



SAL 69



SAL 70



SAL 71




SAL 72



SAL 73



SAL 74



SAL 78



SAL 84



SAL 87



SAL 88



SAL 90




SAL 91



SAL 92



SAL 93



SAL 107



SAL 108



SAL 109



SAL 110



SAL 111



SAL 112



SAL 113



SAL 115



SAL 116

# EKOSUN



AP 01



AP 02



AP 05



AP 06



AP 15



AP 23



AP 27




AP 28



AP 29



AP 30



AP 32



AP 33



AP 34



AP 40



AP 41



AP 43



AP 44



AP 50



AP 63



AP 52



AP 70



AP 71



AP 72



AP 88



AP 95

# GEALAN



GEA 01



GEA 02



GEA 03



GEA 04



GEA 07



GEA 08



GEA 09



GEA 11



GEA 12



GEA 13



GEA 16



GEA 17




GEA 19



GEA 20



GEA 21



GEA 22



GEA 23



GEA 24



GEA 25



GEA 27



GEA 28




GEA 30



GEA 31



GEA 32



GEA 34



GEA 35



GEA 37



GEA 39



GEA 40



GEA 41



GEA 42



GEA 43



GEA 46

# ACRYLCOLOR




DB 703



RAL 7015



RAL 7016



RAL 7039



RAL 7040



RAL 8014



RAL 9005



RAL 9016



SILVER





# ADDITIONS

# WINDOWPANES

The selection of a glazing package is often limited to the selection of the number of panes, which makes them more or less energy-efficient. However, our offer is much wider. We offer energy-saving, sound-absorbing, safe, anti-burglary and anti-dazzle glass panes. Additionally, we have a wide range of ornamental glass, in several dozen designs to choose from.

The inter-pane space of the formed units is usually filled with 90% argon. We also offer krypton-filled glass, thanks to which it is possible to obtain a heat transfer coefficient of up to 0.3 W / m<sup>2</sup>K.

The possibility of joining different types of glass and a smaller or larger number of panes allows for obtaining the appropriate parameters for each type of windows and doors from our offer.

**We present a summary of the basic types of insulating glass with a description of their functions:**



## 1-chamber glazing packages

Single-chamber, double glazing composed of two glass panes. It is a standard for basic window and door systems.



## 2-Double-chamber glazing

Double-chamber, double glazing, increasing thermal comfort in the room. Separation of the inter-pane space with an additional glass pane significantly reduces heat transfer.



## Sound-absorbing

Insulating glass units with a special acoustic foil provide an increased level of soundproofing.



## Secure

Laminated and / or toughened panes increase safety. Their puncture or shatter resistance is adjusted to the customer's requirements.



## Solar control

Panes that reduce the flow of light and solar energy into the room. They are offered with selective, absorbent or reflective glass.



## Fireproof

Single windowpanes, single or double glazed units with fire resistance class EI30 or EI60.

## DECORATIVE WINDOWPANES

Insulating glass with decorative glass is perfect a choice for windows, doors and partitions. Decorative panes will work in homes, offices, shops, hotels and restaurants.

Depending on the chosen pattern, they can not only increase privacy, but also brighten the interior, making it optically larger, which is another advantage.

In addition to standard glass with a matte coating, we also offer ornamental glass with the following patterns:



Crepi



White delta



Delta mat



Cathedral  
white min



White hen



Master-Carre



Silvit white



White  
chinchilla

# BOLECTIONS

The bolections give the windows an elegant and unique character, and in some cases are an indispensable decorative element referring to the old architectural style. Our offer includes both glazing bolections, glued on the glass, and Viennese bolections (the so-called duplex). Each offered type is available in several widths and many colours.




## SPACER BARS SWISSPACER ULTIMATE

In addition to the standard frame made of aluminium, we also offer one of the best warm spacer bars available in the world.

With the Swisspacer Ultimate spacer bar, the  $U$  factor is only  $0.03 \text{ W} / \text{m}^2\text{K}$ . The lower value of this coefficient not only reduces the possibility of water vapor condensation on the periphery of the glass, but also allows for a significant reduction of the thermal transmittance coefficient for the entire window.

The frames are available in several colours from the RAL palette.

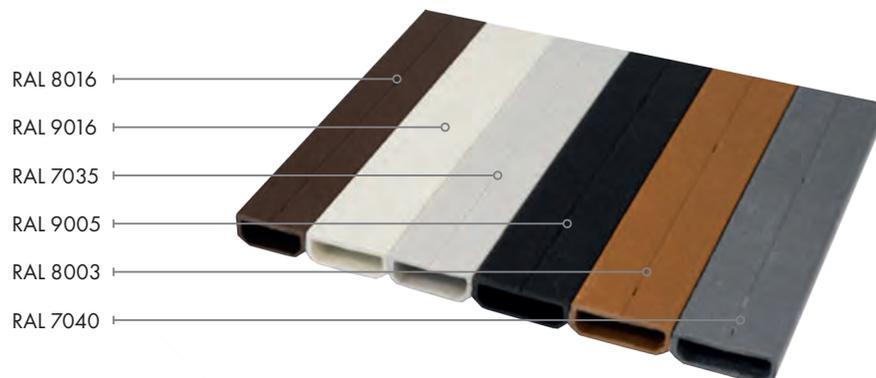

# PVC SYSTEM WINDOW SILLS

System window sills combine aesthetics with the highest quality. Their smooth surfaces are easy to clean, resistant to bumps and scratches. Available in various variants and colours matching the colour of the ordered joinery.



---

## EXTERNAL WINDOW SILLS

You can choose window sills made of aluminium or steel. They are characterized by very good quality and resistance to weather conditions. They are aesthetic, durable, non-flammable, resistant to moisture and chemicals. Thanks to the drip caps they provide ideal protection for the façade.



---

## INTERNAL CHAMBER WINDOW SILLS

They are made of hard polyvinyl chloride, the same that is used in the production of PVC windows and doors. Coated with foil with high resistance to scratching and UV rays. The chamber structure ensures the rigidity of the structure. Window sills are available in many colours.



## VENTILATORS

Ventilators provide not only constant access of fresh air to the interior, but also allow the removal of moisture from the room. It is a convenient way to ventilate rooms without having to open windows, which is especially important in winter. Diffusers are mounted in the shaft rebate, on the upper frame and sash profiles or under the seal.

We offer diffusers with various methods of air supply control - hygroscopic, pressure and manual.

Each diffuser from our offer has appropriate certificates confirming their proper operation in various conditions.




## ANTI-BURGLARY FITTINGS

We offer RC1N and RC2N anti-burglary fittings for customers who value their safety and that of their relatives. Technologically refined solutions are the best barrier against theft.


Safety here is ensured by special pivots and catches that prevent burglary. The catches are connected to the window frame through two walls or closed reinforcement.

The fitting in the RC1N / RC2N standard has a precisely defined selection of all elements depending on the size of the window sashes, so that regardless of the dimensions of the ordered structures, the level of security remains unchanged.

If you want to obtain even higher security of the entire window, we recommend choosing safety glass and gluing it to the sash profile, which will constitute an additional anti-burglary barrier.

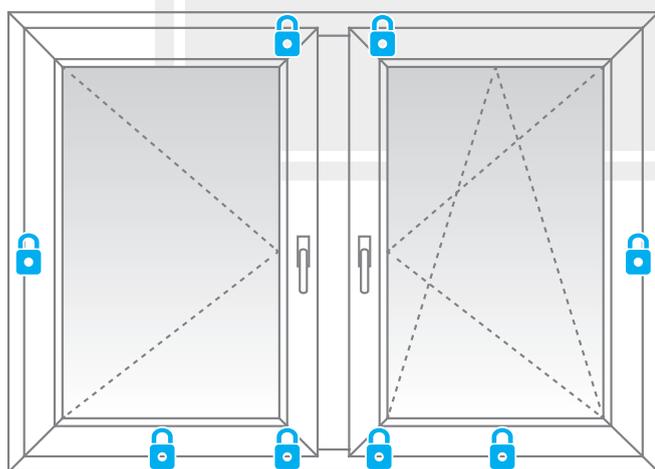

RC1N

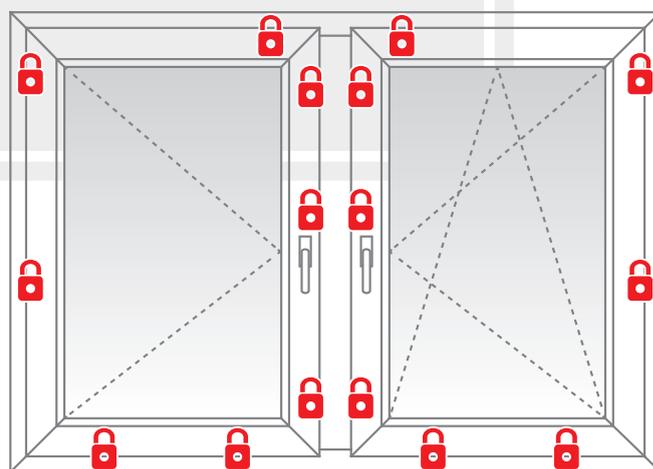

RC2N

# DOOR HANDLES

**Standard handle aluminium**

PVC	ALU	WOOD
●	●	○



- white
- brown
- caramel
- silver
- titanium
- cream

**MACO handle**

PVC	ALU	WOOD
●	●	○



- white
- brown
- caramel
- silver
- titanium
- cream
- golden flash

## HOPPE SECUSTIK handle

PVC	ALU	WOOD
●	●	○



- white
- brown
- caramel
- silver
- titanium
- cream
- arany matt

## MOONLINE handle

PVC	ALU	WOOD
●	○	○



- white
- brown
- gold
- silver
- titanium

## NEW YORK SECUSTIK handle

PVC	ALU	WOOD
●	●	○



- white
- silver
- gold
- cream
- brown

## ROTO handle

PVC	ALU	WOOD
●	●	○



- golden flash
- golden mat

# DOOR HANDLES AND HANDRAILS

Selected models

Available colours: white, brown, cream, silver, gold.



London

Knob

Handle

Double-sided knob

P5

P1

P8

P45

P60

## HANDLES AND HANDRAILS

The offer is appreciated for the variety of patterns, colours, functionality of the handles and their anti-burglary properties.

In addition to standard window handles, we also offer handles with a button or key blocking the possibility of opening the window. We also offer a wide selection of shapes and colours, so you can easily match them to the appearance of the selected joinery. We also offer handles with an anti-drill lock and meeting the burglary resistance requirements in the RC1-RC6 class.

The offer of door handles includes both handles with a standard plate and a separated plate (handle-cylinder). We offer elegant and modern door handles for external doors. They can be of different shapes and lengths. Our offer also includes solutions such as a handle-pull, which limit access to the building from the outside.



A hand is visible on the left side of the frame, pointing towards a dark square. The square is centered and contains the text 'MORE PRODUCTS IN OUR OFFER'. The background consists of horizontal window blinds, with light filtering through them, creating a pattern of light and shadow. The overall composition is clean and modern.

**MORE PRODUCTS  
IN OUR OFFER**

## ROLLER SHUTTERS

Roller shutters produced by Eko-Okna gain recognition all over Europe. Our rich offer includes both top-mounted, concealed and adaptive systems. For customers looking for energy-saving solutions, we offer roller shutters that meet the highest requirements in terms of thermal and acoustic insulation.

We also have a whole range of additional solutions, such as mounting a motor, an espagnolette lock in the armour or supplementing the roller shutter with an integrated mosquito net or an air vent.

As a windows manufacturer, we are able to offer our customers what other roller shutter manufacturers cannot provide - installation of the roller shutter on window frames, renovation frames and monoblock frames already at the production stage.

We have a proven and effective customer service system, guaranteeing timely execution of orders while maintaining high quality products. We guarantee safety and durability.

See more



# MOSQUITO NETS

Mosquito nets are primarily intended to protect the interior against insects and impurities from outside (e.g. leaves, dust). We give our clients the opportunity to choose the method of installation and the type of mosquito net depending on the function and type of window or door opening in which it will be installed. We offer frame, door, sliding and roll mosquito nets.

Thanks to such a wide offer, you gain freedom of choice and confidence that the product has been selected in accordance with its intended use.

As a producer of both windows and mosquito nets, we also offer the possibility of integrating both of these products. Already at the production stage, we can equip the window with a mosquito net, which is a great convenience for customers and solves the problem of protecting the house against insects.

See more



# ALUMINIUM SHUTTERS

A perfect solution combining the durability of aluminium and the traditional design of shutters. Their installation will not only guarantee effective sun protection, but also give the buildings a unique style.

Each shutter is made of the highest quality aluminium, which guarantees the best protection against external conditions and durability for years. It consists of a thick, extruded frame filled with aluminium lamellas.

Three types of shutters are available: side-hung, tilt&fold, sliding. In addition, we offer a choice between movable and fixed slats arranged downwards at a fixed angle. We also offer shutters with a plank panel. A characteristic feature of this model are vertically arranged lamellas, which in a wood-like colour version are a perfect imitation of wood.

See more

**eko okna**

**ALUMINUM WINDOW SHUTTER**

**MOVABLE LAMELLAE MECHANISM**  
This innovative system is well suited to the side profiles of the upper window. The height of the upper and lower frame lamellas is 1/3 of the entire shutter, which allows for a symmetrical movement.

**RENOVATION FRAME SYSTEM**  
The gentle texture of the upper lamella is a feature of several aluminium finishes and for an excellent finishing color. It provides a strong, lasting and maintenance-free finish. It is possible to choose a different color for the upper and lower lamellas.

**SHUTTERS' DIMENSIONS**

**AVAILABLE COLORS**

- color: RAL 7030
- color: RAL 9005
- color: RAL 9010
- color: RAL 9011
- color: RAL 9012
- color: RAL 9013
- color: RAL 9014
- color: RAL 9015
- color: RAL 9016
- color: RAL 9017
- color: RAL 9018
- color: RAL 9019
- color: RAL 9020
- color: RAL 9021
- color: RAL 9022
- color: RAL 9023
- color: RAL 9024
- color: RAL 9025
- color: RAL 9026
- color: RAL 9027
- color: RAL 9028
- color: RAL 9029
- color: RAL 9030
- color: RAL 9031
- color: RAL 9032
- color: RAL 9033
- color: RAL 9034
- color: RAL 9035
- color: RAL 9036
- color: RAL 9037
- color: RAL 9038
- color: RAL 9039
- color: RAL 9040
- color: RAL 9041
- color: RAL 9042
- color: RAL 9043
- color: RAL 9044
- color: RAL 9045
- color: RAL 9046
- color: RAL 9047
- color: RAL 9048
- color: RAL 9049
- color: RAL 9050

## FAÇADE BLINDS

A classic solution that constitutes an exceptionally tight barrier against sunlight due to the use of high-quality materials for its construction and the possibility of installation on the outside of the window.

The method of their assembly makes the entire structure extremely stable, and thanks to the use of a wind sensor, it is resistant to strong blasts of it. Façade blinds in an aesthetic way change the appearance of the building façade. Their installation also slows down heat exchange, which in summer allows the temperature inside the building to be reduced by up to 9°C. As a consequence, they allow for significant energy savings necessary to cool rooms.

See more



## EXTERNAL DOORS

Modern design, a wide range of colours and a wealth of accessories - these are the features that characterize our door offer. The highest quality materials that we use in the production of entrance doors ensure safety and comfort of use. Depending on the functions they are to fulfil, they can be fully glazed or equipped with decorative panels - flat or embossed.

We offer several door collections. One of them is the door with EkoVitre glass panels. Regardless of the pattern chosen, the panels in this series are equipped with laminated glass. All patterns are perfectly matched to the size of the ordered joinery.

The EkoLine series door panels are characterized by high thermal insulation parameters. All thanks to filling the middle part with XPS foam. The surface of the panel, depending on the type selected, can be flat or embossed. A wide range of patterns also includes glazing with shapes developed by our designers. It is also possible to make a pattern according to your own design.

[See more](#)



## SECTIONAL GARAGE DOORS

Sectional doors from our offer will work well in both private homes and industrial facilities.

As standard, we offer sectional doors that are safe, original and aesthetically finished. The richness of accessories will ensure that everyone will receive a product that meets their expectations. When supplemented with electric drives, they can become part of a smart home.

Our offer includes gates with tension springs, torsion springs at the rear and torsion springs at the front. Thanks to this, we avoid the problem of choosing the door to the height of the lintel or the depth of the garage.

See more



## ALL IN ONE DESIGN

The aesthetic line of products "All in one design" not only saves time needed to choose the joinery, but above all guarantees a harmonious appearance of windows, doors, gates and roller shutters. It is also the certainty of complete technological compliance and convenience, which is undoubtedly the possibility of ordering all joinery elements from one manufacturer. We offer "All in One Design" solutions in both PVC and aluminium joinery, adapting to the customer's needs.

Among the compositions prepared by us, there are both those more subdued, recommended for traditional construction, as well as those distinguished by colours and decorations, which will be perfect for modern architecture. It is no accident that the names of individual compositions refer to the names of Italian cities. Italians are known primarily for their love of art and fashion as well as their extraordinary sense of aesthetics.

See more




## SAFE HOME

A fence is not only a way to ensure safety and privacy, but above all it is the crowning achievement of an investment, which is building a house. We offer high-quality, complete fences - spans, gates and wickets. Everything in a dozen or so original designs, refined in every detail. The spans can be filled in a classic, simple or more complex shape.

Standard, Elegance and Prestige - we offer fences made in three styles, thanks to which the customer can easily choose one that will perfectly match the surroundings. The more so that the fences can take any of the colour palettes we offer. An additional advantage is the possibility of creating an individual project, adapted to the topography. Regardless of the appearance and shape of the spans, all fences have one thing in common - solid workmanship.

We offer fences made of galvanized steel and aluminium, which provide excellent corrosion protection.

See more

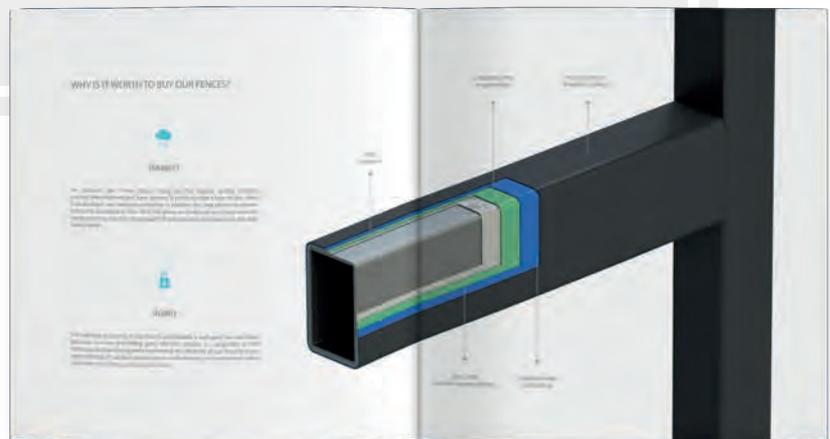



## WOODEN WINDOWS

Naturo joinery is made of many types of wood: Kalzing pine, Kalzing spruce, solid pine, solid spruce, meranti, larch, oak. Regardless of the choice of the type of wood, it is properly selected and glued from 3 or 4 layers with the alternating arrangement of the rings. This, in turn, guarantees the stability and durability of the structure. Our offer of wooden joinery includes windows and doors.

Depending on the client's requirements, interior and facade arrangement, we offer a number of accessories that will emphasize the beauty of the structure.

Optionally, we offer several types of bolections, antique fittings, Retro glazing beads, decorative handles or drip caps with increased durability and an aesthetic wooden finish.

See more



**eko  
okna**

This publication is not a commercial offer. You cannot form the basis of a complaint.  
The photographs shown are for illustrative purposes only and are not actual photographs of the products.



1/2021



Eko-Okna S.A.

ul. Spacerowa 4

47-480 Kornice